

# Ce-lit Radiator Flush

300ml & 300ml Norwegian

## PRODUCT DESCRIPTION

Celit Radiator Flush is a blend of water, sodium silicate and surfactants which has been specifically developed to remove sludge and scale from automotive cooling systems. The product will restore cooling efficiency, prolong engine life and is non damaging to radiator hoses, aluminium, copper and ferrous metals.

## PRODUCT BENEFITS

- \* Restores cooling efficiency
- \* Removes sludge and scale

## PRODUCT USAGE

Radiator Flush will remove sludge and restore cooling efficiency in vehicle cooling systems. Use as part of a routine service or when changing antifreeze.

## DIRECTIONS FOR USE


CAUTION - NEVER REMOVE RADIATOR CAP WHEN ENGINE IS HOT. Drain radiator, remove bottom hose and flush using a hosepipe. Reconnect hose and half fill the radiator with clean water, pour contents into radiator then top up with water. Run engine for 10 minutes. When cool drain radiator, remove bottom hose and flush with hosepipe, reconnect hose and refill with water/antifreeze.

## DOSAGE INFORMATION

Treatment rate: 1 can treats cooling systems from 5-12 litres.

## STORAGE INSTRUCTIONS

Store sealed in a cool, dry place.

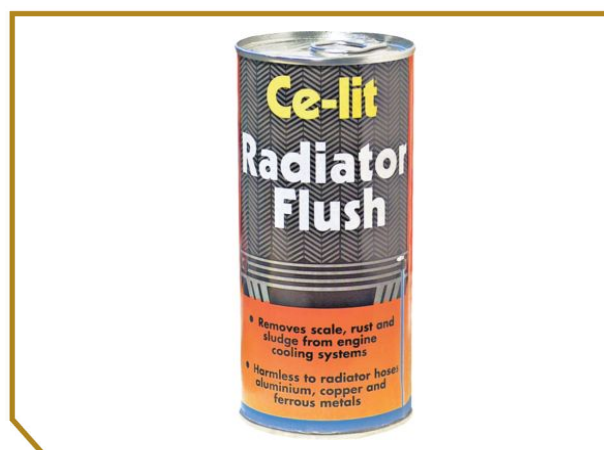

\* Image for illustrative purposes only.

| SIZE            | PART NO | BARCODE       |
|-----------------|---------|---------------|
| 300ml           | 0405    | 5020618004059 |
| 300ml Norwegian | 1679    | N/A           |



# Ce-lit Radiator Flush

300ml & 300ml Norwegian

## SHELF LIFE

18 months from date of manufacture.

|                         |                    |
|-------------------------|--------------------|
| <b>Appearance</b>       | : Pink liquid      |
| <b>Odour</b>            | : Characteristic   |
| <b>Specific Gravity</b> | : 1.0              |
| <b>Solubility</b>       | : Soluble in water |

## SAFETY PRECAUTIONS

Please see our latest EC Safety Data Sheets for details.

## TRANSPORT CLASSIFICATION

Please see our latest EC Safety Data Sheets for details.

